


# Startup Procedure



Turn switch to “on”

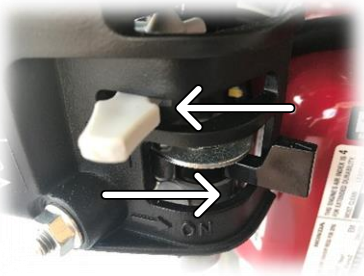

Move top lever leftward (choke on).

Move bottom lever rightward (fuel on).



Move throttle lever leftward 30% of full travel.



Ensure that forward speed handle is in upright position (neutral) before starting engine.



Pull starter handle 2-3 times until engine begins to run.



As engine warms, push choke lever rightward. Choke lever will be completely rightward when engine is warmed up.



When ready to operate the machine, push throttle lever completely to the left.